

© EP000C / EPO

PN - DD154435 A3 19820324  
PD - 1982-03-24  
PR - DD19800219129 19800219  
OPD - 1980-02-19  
IN - BERGTER HERMANN  
PA - BERGTER HERMANN  
IC - B28B7/30

© WPI / DERWENT

TI - Recess former in flat concrete elements - has **moule** bottom mounted shuttering members guided by liftable lid

PR - DD19800219129 19800219

PN - DD154435 A 19820324 DW198234 000pp  
- HU29923 A 19840228 DW198415 000pp  
- CS8009281 A 19840618 DW198436 000pp

PA - (BERG-I) BERGTER H  
- (STAH-N) INST FUER STAHLBETO  
- (BETO-N) VEB BETONLEICHTBAUK

IC - B28B7/30

IN - BERGTER H

AB - DD-154435 The mechanism forms **apertures**, particularly rectangular, in flat concrete elements. It is intended typically for window **openings** in **wall panels** with undercut portions. It comprises shuttering in a number of **movable** components, mounted on a **moule** base.

- The components are connected by positive guides to a **movable** lid. Lifting of the latter pulls the components free of the concrete element at different speeds, so that they do not obstruct each other. The lid is resiliently supported on the shuttering components so that these do not **move** on the **moule** bottom during vibration.

OPD - 1980-02-19

AN - 1982-L0764E [34]

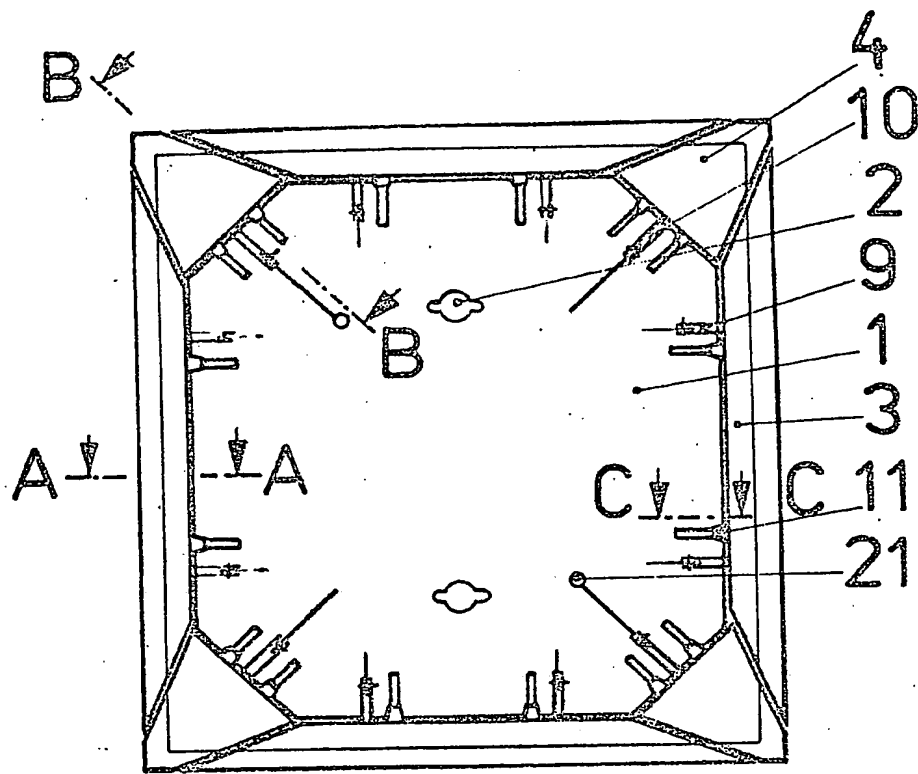


Fig. 1

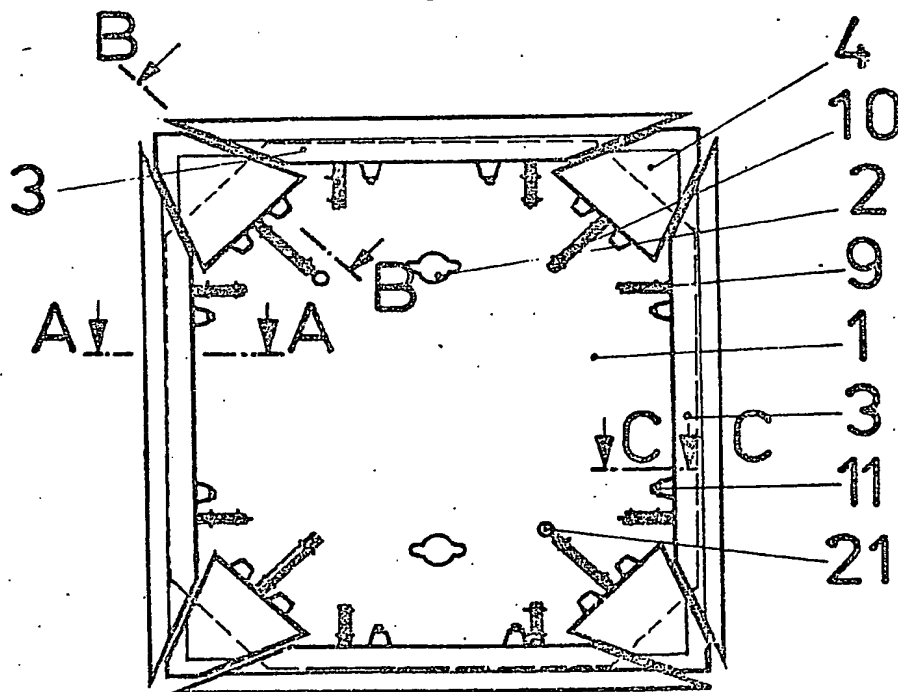


Fig. 2